
TOURING 15



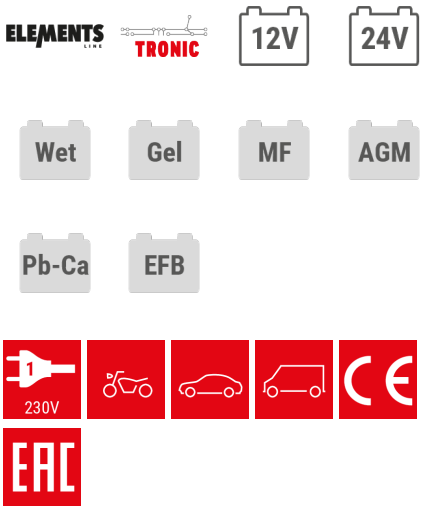

- Battery charger and maintainer with TRONIC technology for WET, GEL, Pb-Ca, AGM, MF, EFB 12/24 V batteries.
- Battery charge status LED signal. Key to set the voltage (12 and 24 V).
- Protection against overcharging, pole inversion and recognition of charge voltage.
- Light and compact.

TECHNICAL DATA

CODE	**807852**	CHARGING VOLTAGE	**12 / 24 V**	MAX.RATED REFERENCE CAPAC.	**115 / 55 Ah**
SINGLEPHASE MAINS VOLTAGE	**220-240 V**	EFFICIENT CHARGING CURRENT	**12 / 6,5 A**	DIMENSIONS (LxWxH)	**12 x 19,5 x 19 cm**
MAINS FREQUENCY	**50 / 60 Hz**	RATED CHAR.CUR.EN60335-2-29	**6 / 4,5 A**	WEIGHT	**2,9 kg**
CHARGING ABSORBED POWER	**130 W**	MIN.RATED REFERENCE CAPAC.	**50 / 30 Ah**		

DESCRIPTION

Electronic battery charger and maintainer with TRONIC technology for 12V/24V WET, GEL, AGM, MF, PbCa, EFB batteries.
LED visualization of the charge level.
Features:

- Automatic charge and maintenance in Tronic;
- 2 charge voltages;
- Protections against overloads, polarity reversal and battery voltage detection.

Equipped with cable with clamps.

DOWNLOAD

CATALOG IMAGE

INSTRUCTION MANUAL

CERTIFICATE